

### MAIN FEATURES

- Built-in photocell function to eliminate the need for an additional ANSI C136 photocell on top of the fixture (can be turned off)
- Mounted to the isolated output of the driver so there is no risk of surge damage from extreme events
- Able to adjust settings via IR remote after installation
- For use in the following EnergyLite product families:
  - HawkLite
  - BroadLite
  - GridLite
  - SecureLite

### CONSTRUCTION

- IP65 polycarbonate housing with UV protection

### RATINGS + CERTIFICATIONS



- Meets California Title 24 motion sensor requirements
- IP65 and IK09 rated
- Contain no lead or mercury

### PERFORMANCE + FUNCTIONALITY

- Power Usage < 0.25W
- Operational Range of -20°C to 70°C
- Lifetime > 100,000 cycles
- Default settings
  - High: 100%
  - Low: 50%
  - Hold: 5 minutes
  - Standby: infinity
  - Photocell: 5fc
  - Sensitivity: 100%
- To eliminate photocell function via IR remote
  - Press "sunlight" button to keep light on
  - Press "1MIN", "15MIN" or "60MIN" button to determine how long the light stays on at low level before turning off

### WARRANTY

- 5-year warranty

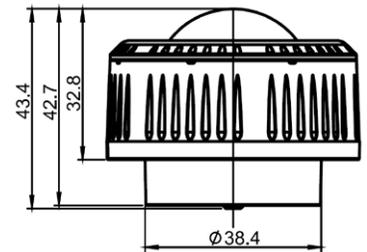

### MOTION SENSOR COVERAGE

