

MAIN FEATURES

- Designed for recessed trimless mount applications
- Concealed adapter option available; Great for use in architectural and high-end applications
- Field-cuttable for custom lengths
- 0-10V dimming down to 1% with GPxc-type adapters



Ordering Information

Track	Voltage	Circuits	Shape	Length	Finish
GP	1 - 120V	3 - 3-circuit/ 1-neutral	RT	4 - 4 ft. Track 8 - 8 ft. Track	PW - White BK - Black

Finish
PW - White
BK - Black

Accessories + Components

GP-UM-TCV - Track Cover
GP-RT-ECC - End Cap
GP-RT-ECF - End Feed Lock
GP-RT-SMC - Straight Mechanical Connector
GP-RT-LMC - "L" Mechanical Connector
GP-RT-SRB - Straight Reinforcement Bracket

GPXX-UM-SJC - Straight Joining Connector
GPXX-UM-SIC - Straight Insulating Connector (Mechanical)
GP13-UM-EFR - End Feed (Right Polarity)
GP13-UM-EFL - End Feed (Left Polarity)
GP13-UM-SFC - Straight Feedable Connector
GP13-UM-LFI - 'L' Feed (Inner Polarity)
GP13-UM-LFO - 'L' Feed (Outer Polarity)
GP13-UM-TOL - 'T' Feed (Outer + Left Polarity)
GP13-UM-TOR - 'T' Feed (Outer + Right Polarity)
GP13-UM-TIL - 'T' Feed (Inner + Left Polarity)
GP13-UM-TIR - 'T' Feed (Inner + Right Polarity)
GP13-UM-XFC - 'X' Feed Connector

GP-UM-TCB - Ceiling Bracket
GP-RT-TCT - Cutting Tool

ELECTRICAL + SAFETY

- 120V, 16A
- 1900W maximum load
- Up to 55 lb. load per 3 ft. section with 2 mounting points
- Up to 22 lb. load per 8 ft. section with 2 mounting points

CONSTRUCTION + FINISH

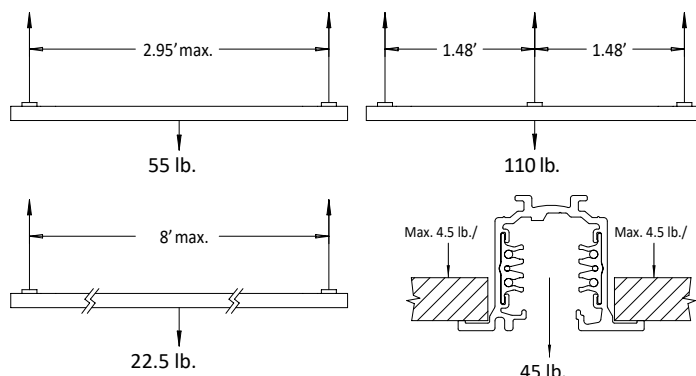
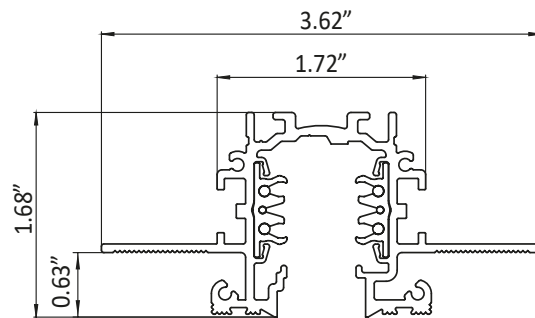
- Extruded thermoplastic insulated
- 12 AWG solid copper conductors
- Insulated extruded body in PVC


















RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® GPxc and Gxc-type fixtures and components

WARRANTY

- 1-year warranty



Gaia+ RT Components			Gaia+ Connectors		
GP-UM-TCV Track Cover PVC body; Length: 1000 mm			GP13-UM-SFC Straight Feedable Connector Polycarbonate body, copper alloy contacts		
GP-RT-ECC End Cap Polycarbonate body with locking screw			GP13-UM-LFI 'L' Feed (Inner Polarity) Polycarbonate body, copper alloy contacts		
GP-RT-ECF End Feed Lock End cap with locking screw; Steel body (Recommended for GP-RT-SMC)			GP13-UM-LFO 'L' Feed (Outer Polarity) Polycarbonate body, copper alloy contacts		
GP-RT-SMC Straight Mechanical Connector Extruded body in aluminum. (1) Required for GP13-UM-EFL/ EFR/TOL/TOR/TIL/TOR			GP13-UM-TOL 'T' Feed (Outer + Left Polarity) Polycarbonate body, copper alloy contacts		
GP-RT-LMC 'L' Mechanical Connector Extruded body in aluminum. (1) Required for GP13-UM-LFI/LFO (2) Required for GP13-UM-TOL/ TOR/TIL/TOR (4) required for GP13-UM-XFC			GP13-UM-TOR 'T' Feed (Outer+ Right Polarity) Polycarbonate body, copper alloy contacts		
GP-RT-SRB Straight Reinforcement Bracket Aluminum body (2) Required per GP-RT-SMC (2) Required per GP13-UM-SJC/SIC (4) Required per GP-RT-LMC			GP13-UM-TIL 'T' Feed (Inner + Left Polarity) Polycarbonate body, copper alloy contacts		
Gaia+ Connectors			GP13-UM-TIR 'T' Feed (Inner + Right Polarity) Polycarbonate body, copper alloy contacts		
GPXX-UM-SJC Straight Joining Connector Polycarbonate body, copper alloy contacts			GP13-UM-XFC 'X' Feed Connector Polycarbonate body, copper alloy contacts		
GPXX-UM-SIC Straight Insulating Connector (Mechanical) Polycarbonate body			GP-UM-TCB Ceiling Bracket		
GP13-UM-EFR End Feed (Right Polarity) Polycarbonate body, copper alloy contacts			GP-RT-TCT Cutting Tool for Recessed Trimless track conductors; Steel		
GP13-UM-EFL End Feed (Left Polarity) Polycarbonate body, copper alloy contacts		