

PROJECT _____

SPECIFIER _____

SPECIFICATION _____

TYPE _____

MAIN FEATURES

- Heavy duty trunking system with integrated 1- or 2-circuit j-type track
- Eliminates need for additional unistrut
- Allows mounting points up to 12 feet apart

CONSTRUCTION + FINISH

- Weight: 1.4 lbs per linear foot
- Extruded thermoplastic insulated 12 AWG solid copper conductors
- Extruded aluminum "I beam" construction

ELECTRICAL + SAFETY

- 120V
- 2400W maximum load
- 85 lb. max per 12 ft. linear section with 2 mounting points

RATINGS + CERTIFICATIONS

- UL Certified for dry locations (E490845)
- RoHS-compliant
- Designed for use with Solais J-type fixtures

WARRANTY

- 1-year warranty



Ordering Information

Example: RB2-SH/4/PW


Type	Length	Finish
RB1-SH - (1/1)	2' - 2 ft.	PW - Perfect White
RB2-SH* - (2/1)	4 - 4 ft.	BK - Black
	8 - 8 ft.	SV* - Silver
	12* - 12 ft.	

Ordering Information


Example: RB-XC/PW

Connectors + Accessories	Finish
RB-SH-EFC - End Feedable Connector	PW - Perfect White
RB-SH-SFC - Straight Feedable Connector	BK - Black
RB-SH-TFC - 'T' Feedable Connector	SV* - Silver
RB-SH-LFC - 'L' Feedable Connector	
RB-SH-XFC - 'X' Feedable Connector	
RB-UM-TCV - Track Cover	


SS-UM-ACL - Aircraft cable with Loop; 20 ft.	n/a (blank)
SS-UM-ACB - Aircraft cable with Barrel; 20 ft.	
SS-UM-SEG - Side Cable Exit Gripper	
SS-UM-SMC - Surface Mount Cable Gripper	
SS-UM-DLG - Double Mechanism Looping Gripper	
SS-UM-TST - T-bar Seismic Suspension Clip	

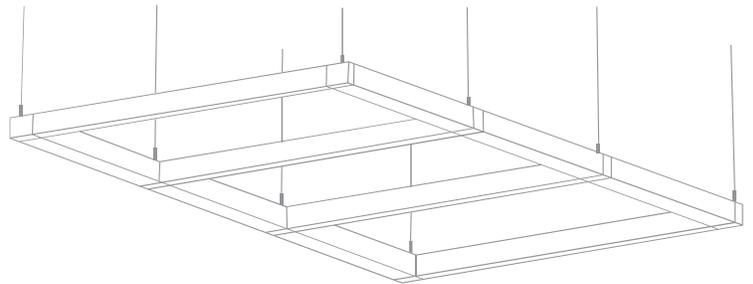

Single Circuit/Single Neutral






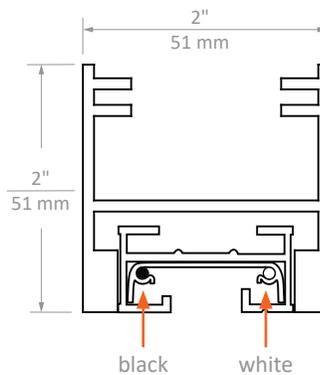


Double Circuit/Single Neutral

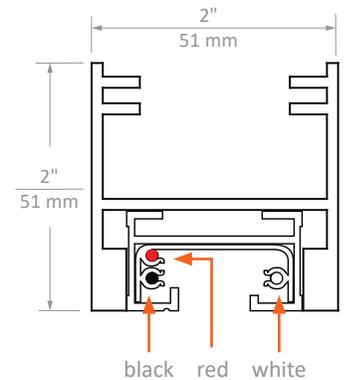

* Direct ship, special order only. Consult factory for MOQs and more information.
+ Limited quantities available. Consult factory for more information.



Connectors + Accessories			
RB-SH-EFC	End Feedable Connector		
RB-SH-SFC	Straight Feedable Connector		
RB-SH-TFC	'T' Feedable Connector		
RB-SH-LFC	'L' Feedable Connector		
RB-SH-XFC	'X' Feedable Connector		
RB-UM-TCV	Track Cover for top of Rigid Beam extrusion Polycarbonate; 4 ft., Field-cuttable		

J-Type Track Accessories Continued		
SS-UM-TSC	T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>	
SS-UM-ACL	Aircraft Cable with Loop <i>20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-ACB	Aircraft Cable with Barrel <i>20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-SEG	Side Cable Exit Gripper <i>For use with 3/64" or 1/16" threaded cable only. Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>	
SS-UM-SMC	Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>	
SS-UM-DLG	Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exits for use with 3/64" or 1/16" threaded cable only.</i>	
SS-UM-CPC	Ceiling cup with ceiling bracket and screw gripper for use with cable suspension	
SS-UM-SBK	Seismic/Sway Bracing Kit <i>Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</i>	

