

R-XSR1

XM20 | XM24 | XM30
MS3 | INDY-JUNO MULTIPLE


SOLAIS®

PROJECT


TYPE

SPECIFICATION


- Made-to-order product*
 - Upgrade to modular Solais multiples without complicated re-installation
 - Replacement for Indy/Juno MS30 Recessed Multiples.
One retrofit ring needed per head in fixture.
 - 120 V Standard
 - 0-10 V*, Triac and ELV dimming with Xm20 and Xm24
 - Modular individually specifiable optics
 - 50,000 Hours (L70)
 - Integrated driver
 - UL Certified
 - RoHS-compliant
 - Dry location rating
 - Contain no lead or mercury
 - *MonoWhite color rendering enhancements available
 - * 90+ High CRI available.
- To order, replace 'K' in CCT designation with 'h' in code below

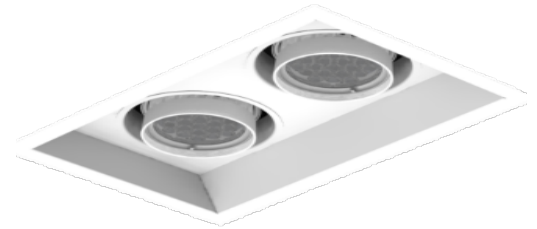


Retrofit kit with Xm20



Retrofit kit with Xm24



Retrofit kit with Xm30



Ordering Information

Example: R-XSR1/MS3/Xm24/25c/30K/2000/WH/SL

Fixture	Type	Module	Beam Spread	CCT / Lumens	Finish	Options + Accessories
R-XSR1	MS3	Xm20	COB-optic	25K* / 900	WH - White	Module Options
			10c	27K / 1050	BK - Black	HL - Honeycomb Louver
			15c	30K / 1100		SL - Linear Spread
			25c	30m* / 1100		SP - Prismatic Spread
			40c	35K* / 1100		More Accessories Available
			60c	35m* / 1100		
				40K* / 1100		Fixture Options
				25K* / 1400		010 - 0-10 V Dimming*
				27K / 1450		EM - Emergency Backup
				30K / 1500		Microinverter*
				30m* / 1500		
				35K* / 1500		
				35m* / 1500		
				40K* / 1500		
		Xm24	COB-optic	25K* / 1400		
			15c	27K / 1550		
			25c	30K / 1600		
			40c	30m* / 1600		
			60c	35K* / 1600		
				35m* / 1600		
				40K* / 1600		
				25K* / 2000		
				27K / 2000		
				30K / 2000		
				30m* / 2000		
				35K* / 2000		
				35m* / 2000		
				40K* / 2000		
		Xm30	Multi-optic	30K / 2100		
			15c			
			25c			
			40c			
			60c			

*Consult factory for lead time and availability
Note: MonoWhite and High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent; Although, VioLight product perceived lumens will be noticeably higher than their standard counterparts.

R-XSR1

XM20 | XM24 | XM30
MS3 | INDY-JUNO MULTIPLE

SOLAIS®

PROJECT



TYPE

SPECIFICATION



Optic	Output	Wattage
Xm20 COB-optic	1500 lm	17 W
Xm20 COB-optic	1100 lm	13 W
Xm24 COB-optic	2000 lm	22 W
Xm24 COB-OPTIC	1600 LM	18 W
Xm30 Multi-optic	2100 lm	20 W

TM30 COLOR REPORTS



- 3000K with 80+ CRI
- $R_f = 84$; $R_g = 94$
- $R_A = 82$; $R_9 = 11$





- 3000K with 90+ CRI
- $R_f = 92$; $R_g = 100$
- $R_A = 93$; $R_9 = 56$

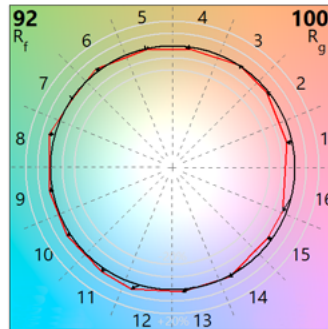

- 3000K with 97+ CRI
- $R_f = 96$; $R_g = 104$
- $R_A = 97$; $R_9 = 98$



- 3000K with MonoWhite
- $R_f = 91$; $R_g = 100$
- $R_A = 91$; $R_9 = 42$

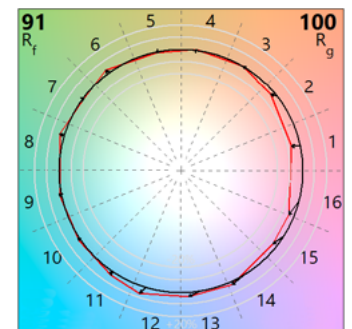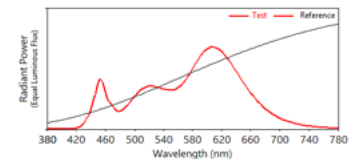

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.
NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.



X-Changeable is our all-in-one technology that incorporates the optics, LEDs, driver and power within a replaceable module. This allows you to change the lumen output, color temperature, beam angle and trim color with ease.



Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



VioLight radiates superior quality, enhancing colors in merchandise, making colors more vibrant and offering a truly competitive LED replacement for CMH-like crispness.