


SCATTO | SCRT

48V TRACK SYSTEM
SHORT RECESSED FLANGELESS | GYPSUM

MAIN FEATURES

- Designed for recessed flangeless applications with ½" gypsum
- Designed for linear luminaires to extend past the track and trackhead adapters to sit flush
- Great for use in architectural and high-end applications
- Field-cutable for custom lengths

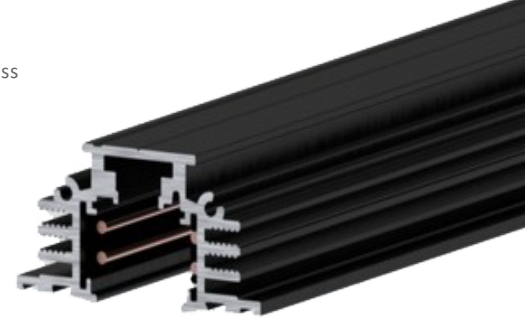

Ordering Information



Finish
BK - Black

Scatto Type + Length

SC31-RT-4 - 4ft. Recessed flangeless, gypsum
SC31-RT-8 - 8ft. Recessed flangeless, gypsum



Finish
BK - Black

SC31 Connectors

SC31-UM-EFR - End feed, Right Polarity
SC31-UM-EFL - End feed, Left Polarity
SC31-UM-SJC - Straight Joining Connector
SC31-UM-SIC - Straight Insulating Connector
SC31-UM-LFI - 'L' live feed, Inner Polarity
SC31-UM-LFO - 'L' live feed, Outer Polarity
SC31-UM-TOL - 'T' live feed, Outer/Left Polarity
SC31-UM-TOR - 'T' live feed, Outer/Right Polarity
SC31-UM-TIL - 'T' live feed, Inner/Left Polarity
SC31-UM-TIR - 'T' live feed, Inner/Right Polarity
SC31-UM-XFC - 'X' live feed
SC31-UM-ACR - Adjustable Connector



Finish
BK - Black

SC31-RT Accessories

SC-RT-ECC - End Cap
SC-RT-HMC - Horizontal Mechanical Corner Joint
SC-RT-EMC - External Vertical Mechanical Corner Joint
SC-RT-IMC - Internal Vertical Mechanical Corner Joint
SC-RT-TCB - Trimless Ceiling Bracket
SC-UM-SRB - Straight Reinforcing Bracket
SC-UM-TCT - Conductor Cutting Tool

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Scatto™ fixtures and components

ELECTRICAL + SAFETY



- 48V, +/- 2A
- 96W maximum load







































CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY

- 3-year warranty



Accessories			Scatto Connector		
SC-RT-ECC End Cap <i>Metal end cap;</i>			SC31-UM-SJC Straight Joining Connector <i>Polycarbonate body, copper alloy contacts</i>		
SC-RT-HMC Horizontal Mechanical Corner Joint <i>PMMA</i>			SC31-UM-SIC Joining Insulating Connector, Mechanical <i>Polycarbonate body</i>		
SC-RT-EMC External Vertical Mechanical Corner Joint <i>PMMA</i>			SC31-UM-LFI 'L' live feed, Inner Polarity <i>Polycarbonate body, copper alloy contacts</i>		
SC-RT-IMC Internal Vertical Mechanical Corner Joint <i>PMMA</i>			SC31-UM-LFO 'L' live feed, Outer Polarity <i>Polycarbonate body, copper alloy contacts</i>		
SC-RT-TCB Trimless Ceiling Bracket <i>Raw aluminum; Supplied with screws (not mounted) (4) required per 4ft section (6) required per 8ft section</i>			SC31-UM-LFO 'L' live feed, Outer Polarity <i>Polycarbonate body, copper alloy contacts</i>		
SC-UM-SRB Reinforcing Bracket <i>Aluminum joining connector.</i>			SC31-UM-TOL 'T' live feed, Outer/Left Polarity <i>Polycarbonate body, copper alloy contacts, 2 PMMA covers</i>		
SC-SX-TCV Aesthetic Track Cover <i>PMMA; Field cuttable, 118 1/2" 3000 mm Compatible with SCST, SCRT, SCST, SCRF, and SCST</i>			SC31-UM-TOR 'T' live feed, Outer/Right Polarity <i>Polycarbonate body, copper alloy contacts, 2 PMMA covers</i>		
			SC31-UM-TIL 'T' live feed, Inner/Left Polarity <i>Polycarbonate body, copper alloy contacts, 2 PMMA covers</i>		
			SC31-UM-TIR 'T' live feed, Inner/Right Polarity <i>Polycarbonate body, copper alloy contacts, 2 PMMA covers</i>		
			SC31-UM-XFC 'X' live feed <i>Polycarbonate body, copper alloy contacts, 3 PMMA covers</i>		
			SC31-UM-ACR Adjustable Connector <i>Polycarbonate body, copper alloy contacts</i>		
SC31-UM-EFL End feed, Left Polarity <i>Polycarbonate body, copper alloy contacts</i>					
SC31-UM-EFR End feed, Right Polarity <i>Polycarbonate body, copper alloy contacts</i>	