

SCATTO | SCSH

48V TRACK SYSTEM
SHORT SURFACE MOUNT | SUSPENSION

MAIN FEATURES

- Designed for surface mount or hanging suspension applications
- Designed for linear luminaires to extend past the track and trackhead adapters to sit flush
- Great for use in architectural and high-end applications
- Field-cutable for custom lengths




Ordering Information



Scatto Type + Length

SC31-SH-4 - 4ft. Short Suspension
SC31-SH-8 - 8ft. Short Suspension




SC31 Accessories

SC-SH-ECC - End Cap
SC-SH-ECF - Feedable End Cap
SC-UM-TCT - Conductor Cutting Tool



SC31 Connectors

SC31-UM-EFR - End feed, Right Polarity
SC31-UM-EFL - End feed, Left Polarity
SC31-UM-SJC - Straight Joining Connector
SC31-UM-SIC - Straight Isolating Connector
SC31-UM-LFI - 'L' live feed, Inner Polarity
SC31-UM-LFO - 'L' live feed, Outer Polarity
SC31-UM-TOL - 'T' live feed, Outer/Left Polarity
SC31-UM-TOR - 'T' live feed, Outer/Right Polarity
SC31-UM-TIL - 'T' live feed, Inner/Left Polarity
SC31-UM-TIR - 'T' live feed, Inner/Right Polarity
SC31-UM-XFC - 'X' live feed
SC31-UM-ACR - Adjustable Connector



Scatto Suspension

SC-UM-TCC - Ceiling Clamp
SC-UM-LJB - Long Joining Bracket
SC-UM-LSB - 'L' Suspension Bracket
SS-UM-SEG - Side Exit Gripper
SS-UM-SMC - Surface Mount Cable Coupler
SS-UM-DLG - Double Looping-Gripper
SS-UM-ACB - Barrel End Aircraft Cable, 20 ft.
SS-UM-ACL - Loop End Aircraft Cable, 20 ft.
SS-UM-CPC - Ceiling Cup with Ceiling Bracket

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® Scatto™ fixtures and components

ELECTRICAL + SAFETY




- 48V, +/- 2A
- 96W maximum load

CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY


- 3-year warranty

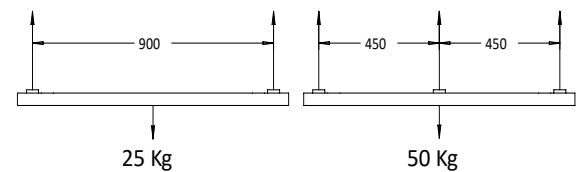

Accessories


SC-SH-ECC

End Cap
Polycarbonate body





SC-SH-ECF

Feedable End Cap
Polycarbonate body



SC-SX-TCV


Aesthetic Track Cover
PMMA; Field cuttable,
118 1/2" | 3000 mm
Compatible with SCST, SCRT, SCSH,
SCRF, and SCSM



Scatto Connector


SC31-UM-EFL

End feed, Left Polarity
Polycarbonate body,
copper alloy contacts




SC31-UM-EFR

End feed, Right Polarity
Polycarbonate body,
copper alloy contacts




SC31-UM-SJC

Straight Joining Connector
Polycarbonate body,
copper alloy contacts



SC31-UM-SIC


Joining Insulating Connector,
Mechanical
Polycarbonate body



Scatto Connector


SC31-UM-LFI

'L' live feed, Inner Polarity
Polycarbonate body,
copper alloy contacts




SC31-UM-LFO

'L' live feed, Outer Polarity
Polycarbonate body,
copper alloy contacts





SC31-UM-TOL

'T' live feed, Outer/Left Polarity
Polycarbonate body, copper alloy
contacts, 2 PMMA covers




SC31-UM-TOR

'T' live feed, Outer/Right Polarity
Polycarbonate body, copper alloy
contacts, 2 PMMA covers




SC31-UM-TIL

'T' live feed, Inner/Left Polarity
Polycarbonate body, copper alloy
contacts, 2 PMMA covers




SC31-UM-TIR

'T' live feed, Inner/Right Polarity
Polycarbonate body, copper alloy
contacts, 2 PMMA covers



SC31-UM-XFC















'X' live feed
Polycarbonate body, copper alloy
contacts, 3 PMMA covers



SC31-UM-ACR

Adjustable Connector
Polycarbonate body,
copper alloy contacts



Scatto Suspension			Track Suspension Accessories		
SC-UM-TCC Ceiling Clamp <i>Steel; Recommended for use with SS-U-SEG</i>			SS-UM-TSC T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>		
SC-UM-LJB Long Joining Bracket <i>Steel; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</i>					
SC-UM-LSB 'L' Suspension Bracket <i>Steel; For aircraft Cable Suspension; Recommended for use with SS-U-SEG</i>			SS-UM-ACL Aircraft Cable with Loop <i>20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</i>		
SS-UM-CPC Ceiling Cup <i>with ceiling bracket and screw gripper for use with cable suspension</i>			SS-UM-ACB Aircraft Cable with Barrel <i>20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</i>		
			SS-UM-SEG Side Cable Exit Gripper <i>For use with 3/64" or 1/16" threaded cable only. Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>		
			SS-UM-SMC Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>		
			SS-UM-DLG Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exits for use with 3/64" or 1/16" threaded cable only.</i>		
			SS-UM-SBK Seismic/Sway Bracing Kit <i>Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</i>	