

PROJECT _____ TYPE _____

SPECIFIER _____ MEMO _____

ORDERING CODE BREAKDOWN _____

MAIN FEATURES

- Designed for surface mount or hanging suspension applications
 - Lower emission designed for linear luminaires to sit flush and trackheads to recess into the track. (SC2 mounting required)
 - Upper emission designed for linear luminaires to extend past the track and trackhead adapters to sit flush
 - Great for use in architectural and high-end applications
- Field-cutttable for custom lengths



Ordering Information

Scatto Track
 SC31-UD-4 - 4ft. Double emission suspended
 SC31-UD-8 - 8ft. Double emission suspended

Scatto Track Accessories
 SC-UD-ECC - End Cap
 SC-LX-TCV - Track Cover
 SC-UM-SRB - Reinforcing Bracket

SC31 Connectors
 SC31-UM-EFR - End feed, Right Polarity
 SC31-UM-EFL - End feed, Left Polarity
 SC31-UM-SJC - Straight Joining Connector
 SC31-UM-SIC - Straight Insulating Connector
 SC31-UM-LFI - 'L' live feed, Inner Polarity
 SC31-UM-LFO - 'L' live feed, Outer Polarity
 SC31-UM-TOL - 'T' live feed, Outer/Left Polarity
 SC31-UM-TOR - 'T' live feed, Outer/Right Polarity
 SC31-UM-TIL - 'T' live feed, Inner/Left Polarity
 SC31-UM-TIR - 'T' live feed, Inner/Right Polarity
 SC31-UM-XFC - 'X' live feed
 SC31-UM-ACR - Adjustable Connector

Scatto Suspension
 SC-UM-TCC - Ceiling Clamp
 SS-UM-SEG - Side Exit Gripper
 SS-UM-SMC - Surface Mount Cable Coupler
 SS-UM-DLG - Double Looping-Gripper
 SS-UM-ACB - Barrel End Aircraft Cable, 20 ft.
 SS-UM-ACL - Loop End Aircraft Cable, 20 ft.
 SS-UM-CPC - Ceiling Cup with Ceiling Bracket

RATINGS + CERTIFICATIONS




- UL Certified for dry locations
 - RoHS-compliant
 - Designed for use with Solais® Scatto™ fixtures and components
- ELECTRICAL + SAFETY**
- 48V, +/- 2A
 - 96W maximum load

CONSTRUCTION + FINISH

- Extruded aluminum construction standard finish in black (RAL 9005)
- Insulated extruded body in PVC
- Solid copper conductors

WARRANTY

- 3-year warranty

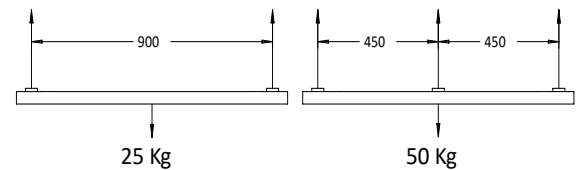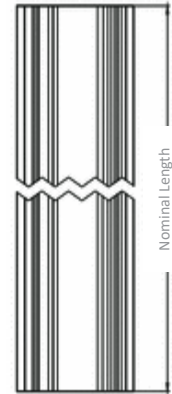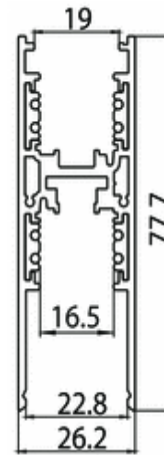

Accessories		
SC-UD-ECC End Cap <i>Metal end cap;</i> <i>Compatible with SCLH and SCUD</i>		
SC-LX-TCV Aesthetic Track Cover <i>PMMA; Field cuttable,</i> <i>118 1/2" 3000 mm</i> <i>Compatible with SCLH, SCTM,</i> <i>SCUD</i>		
SC-UM-SRB Reinforcing Bracket <i>Aluminum joining connector</i>		
SC-UD-LMB 'L' Mechanical Bracket <i>Polycarbonate body</i>		
SC-UD-TMB 'T' Mechanical Bracket <i>Polycarbonate body</i>		
SC-UD-XMB 'X' Mechanical Bracket <i>Polycarbonate body</i>		

Scatto Connector		
SC31-UM-EFL End feed, Left Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
SC31-UM-EFR End feed, Right Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
SC31-UM-SJC Straight Joining Connector <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
SC31-UM-SIC Joining Isolating Connector, Mechanical <i>Polycarbonate body</i>		

Scatto Connector		
SC31-UM-LFI 'L' live feed, Inner Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
SC31-UM-LFO 'L' live feed, Outer Polarity <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		
SC31-UM-TOL 'T' live feed, Outer/Left Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
SC31-UM-TOR 'T' live feed, Outer/Right Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
SC31-UM-TIL 'T' live feed, Inner/Left Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
SC31-UM-TIR 'T' live feed, Inner/Right Polarity <i>Polycarbonate body, copper alloy</i> <i>contacts, 2 PMMA covers</i>		
SC31-UM-XFC 'X' live feed <i>Polycarbonate body, copper alloy</i> <i>contacts, 3 PMMA covers</i>		
SC31-UM-ACR Adjustable Connector <i>Polycarbonate body,</i> <i>copper alloy contacts</i>		

Scatto Suspension		
<p>SC-UM-TCC Ceiling Clamp Steel; Recommended for use with SS-U-SEG</p>		
<p>SS-UM-CPC Ceiling Cup with ceiling bracket and screw gripper for use with cable suspension</p>		

Track Suspension Accessories		
<p>SS-UM-TSC</p>	<p>T-bar Seismic Suspension Clamp For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</p>	
<p>SS-UM-ACL</p>	<p>Aircraft Cable with Loop 20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</p>	
<p>SS-UM-ACB</p>	<p>Aircraft Cable with Barrel 20 feet of 1/16" galvanized cable. Recommended for use with SS-UM-SEG.</p>	
<p>SS-UM-SEG</p>	<p>Side Cable Exit Gripper For use with 3/64" or 1/16" threaded cable only. Recommended for use with SS-UM-ACL or SS-UM-ACB.</p>	
<p>SS-UM-SMC</p>	<p>Surface Mount Cable Coupler 2-part non-adjustable cable coupler Recommended for use with SS-UM-ACB.</p>	
<p>SS-UM-DLG</p>	<p>Double Mechanism Looping Gripper Double-ended gripper with double side cable exits for use with 3/64" or 1/16" threaded cable only.</p>	
<p>SS-UM-SBK</p>	<p>Seismic/Sway Bracing Kit Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</p>	