

YSRrm

Y-SERIES | YM20

SEMI RECESSED REMODEL

SOLAIS®

PROJECT _____

TYPE _____

SPECIFICATION _____

- Upgrade to modular Solais multiples without complicated re-installation
- 120 - 277 V standard
- 0-10 V, TRIAC and ELV dimming
- Emergency backup available
- Passively cooled fixtures
- 50,000 Hours (L70)
- UL Certified for dry locations
- RoHS-compliant
- Contains no lead or mercury
- Non-IC rated; insulation must be kept 3" from sides and 1" above housing
- *MonoWhite color rendering enhancements available
- *90+ High CRI available. To order, replace 'K' in CCT designation with 'h' in code below



YSR11rm

Y-SERIES | YM20

SEMI RECESSED REMODEL


SOLAIS®

PROJECT

TYPE

SPECIFICATION

- Max Ceiling Thickness: $\frac{5}{8}$ "
- Ceiling Cut-Out: $5\frac{3}{4}$ " x $5\frac{1}{2}$ "
- Weight without module: 3 lbs.

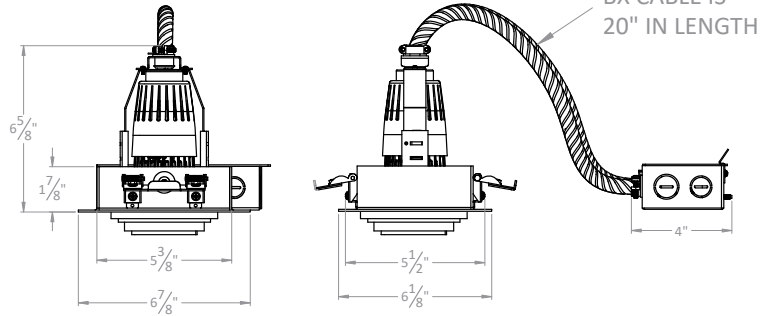

Ordering Information

Example: YSR11rm/Ym20/25/30K/1100/WH/WH/SL

Fixture	Module	Beam Spread	CCT	Lumens	Options + Accessories
YSR11rm	Ym20	15c	22K - 2200K*	1000	Module Options HL - Honeycomb Louver SL - Linear Spread SP - Prismatic Spread More Accessories Available Fixture Options EM - Emergency Backup Trim Finish Die-cast, Powder Coated WH / WH - White Module, Interior + Flange PW / PW* - Pure White Module, Interior + Flange BK / BK - Black Module, Interior + Flange BK / WH* - Black Module + Interior, White Flange BK / PW* - Black Module, Interior + Flange
		25c	25K - 2500K*	1400	
		40c	27K - 2700K		
		60c	30K - 3000K		
			35K - 3500K*		
			40K - 4000K*		
			MonoWhite (90 CRI)		
			30m - 3000K		
			35m - 3500K*		
			Dim-to-Warm (90 CRI)		
		25c	D27 - 2700K to 1800K	1200	
		40c			

*Consult factory for lead time and availability

YSR12rm

Y-SERIES | YM20

SEMI RECESSED REMODEL



SOLAIS®

PROJECT

TYPE

SPECIFICATION

- Max Ceiling Thickness: $\frac{5}{8}$ "
- Ceiling Cut-Out: $5\frac{3}{4}$ " x $10\frac{1}{4}$ "
- Weight without module: 4¼ lbs.

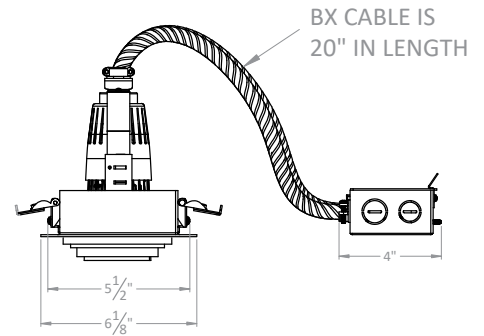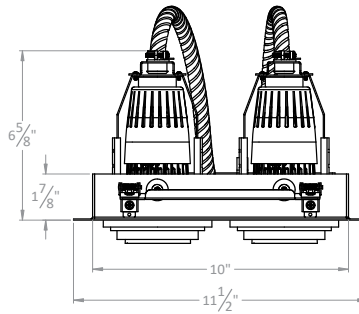

Ordering Information

Example: YSR12rm/Ym20/25-25/30K/1100/WH/WH/SL-SL

		1	-	2			1	-	2
		/	/	-	/	/	/	/	-
Fixture	Module	Beam Spread	CCT		Lumens			Options + Accessories	
YSR12rm	Ym20							Module Options	
		15c	22K - 2200K*		1000			HL - Honeycomb Louver	
		25c	25K - 2500K*		1400			SL - Linear Spread	
		40c	27K - 2700K					SP - Prismatic Spread	
		60c	30K - 3000K					More Accessories Available	
			35K - 3500K*					Fixture Options	
			40K - 4000K*					EM - Emergency Backup	
			MonoWhite (90 CRI)						
			30m - 3000K						
			35m - 3500K*						
			Dim-to-Warm (90 CRI)						
		25c	D27 - 2700K to 1800K	1200					
		40c							

YSR13rm

Y-SERIES | YM20

SEMI RECESSED REMODEL



SOLAIS®

PROJECT

TYPE

SPECIFICATION

- Max Ceiling Thickness: $\frac{5}{8}$ "
- Ceiling Cut-Out: $5\frac{3}{4}$ " x $14\frac{3}{4}$ "
- Weight without module: 6 $\frac{1}{2}$ lbs.

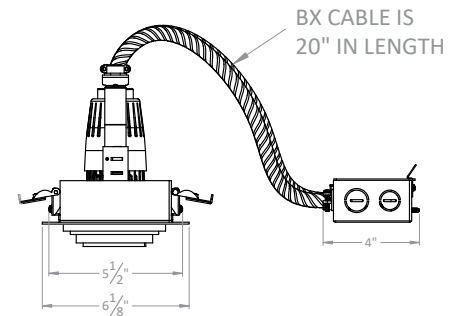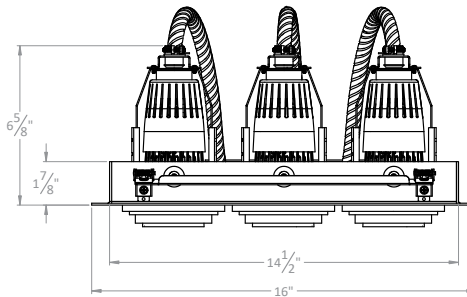

Ordering Information

Example: YSR13rm/Ym20/25-25-25/30K/1100/WH/WH/SL-SL-SL

1 - 2 - 3			1 - 2 - 3		
Fixture	Module	Beam Spread	CCT	Lumens	Options + Accessories
YSR13rm	Ym20				
		15c	22K - 2200K*	1000	Module Options
		25c	25K - 2500K*	1400	HL - Honeycomb Louver
		40c	27K - 2700K		SL - Linear Spread
		60c	30K - 3000K		SP - Prismatic Spread
			35K - 3500K*		More Accessories Available
			40K - 4000K*		Fixture Options
			MonoWhite (90 CRI)		EM - Emergency Backup
			30m - 3000K		
			35m - 3500K*		
		25c	Dim-to-Warm (90 CRI)		
		40c	D27 - 2700K to 1800K	1200	
					Trim Finish
					Die-cast, Powder Coated
					WH / WH - White Module, Interior + Flange
					PW / PW* - Pure White Module, Interior + Flange
					BK / BK - Black Module, Interior + Flange
					BK / WH* - Black Module + Interior, White Flange
					BK / PW* - Black Module, Interior + Flange

*Consult factory for lead time and availability

YSR14rm

Y-SERIES | YM20

SEMI RECESSED REMODEL


SOLAIS®

PROJECT

TYPE

SPECIFICATION

- Max Ceiling Thickness: $\frac{5}{8}$ "
- Ceiling Cut-Out: $5\frac{3}{4}$ " x $19\frac{3}{8}$ "
- Weight without module: 8 $\frac{3}{8}$ lbs.

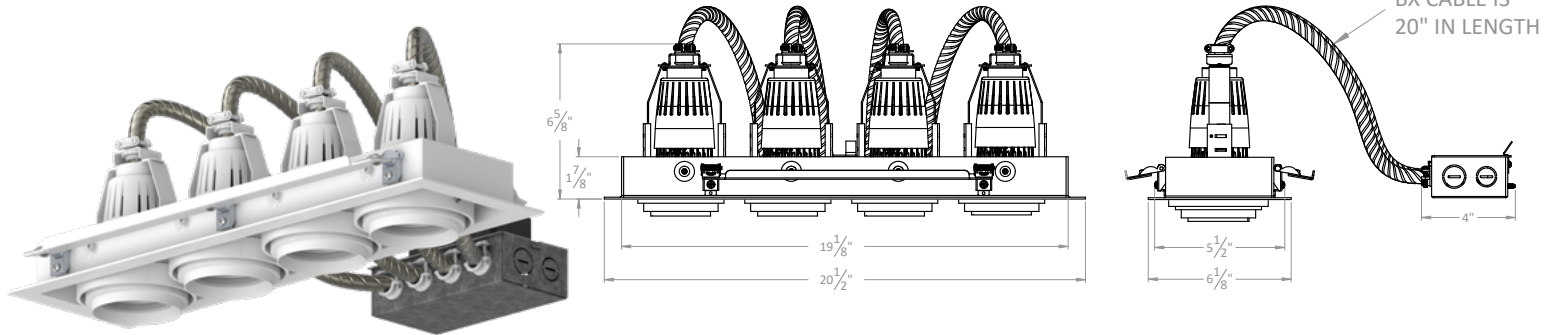

Ordering Information

Example: YSR14rm/Ym20/25-25-25-30K/1100/WH/WH/SL-SL-SL-SL

1 - 2 - 3 - 4				1 - 2 - 3 - 4			
Fixture	Module	Beam	CCT	Lumens			
YSR14rm	Ym20	Spread					
		15c	22K - 2200K*	1000			
		25c	25K - 2500K*	1400			
		40c	27K - 2700K				
		60c	30K - 3000K				
			35K - 3500K*				
			40K - 4000K*				
			MonoWhite (90 CRI)				
			30m - 3000K				
			35m - 3500K*				
		25c	Dim-to-Warm (90 CRI)				
		40c	D27 - 2700K to 1800K	1200			
					Options + Accessories		
					Module Options		
					HL - Honeycomb Louver		
					SL - Linear Spread		
					SP - Prismatic Spread		
					More Accessories Available		
					Fixture Options		
					EM - Emergency Backup		
					Trim Finish		
					Die-cast, Powder Coated		
					WH / WH - White Module, Interior + Flange		
					PW / PW* - Pure White Module, Interior + Flange		
					BK / BK - Black Module, Interior + Flange		
					BK / WH* - Black Module + Interior, White Flange		
					BK / PW* - Black Module, Interior + Flange		

*Consult factory for lead time and availability

YSRrm

Y-SERIES | YM20

SEMI RECESSED REMODEL

SOLAIS®

PROJECT

TYPE

SPECIFICATION

PHOTOMETRIC DETAILS | baseline X output multiplier X cri-cct multiplier = final output

Ym20 COB OPTIC: Baseline data shown below for 19 W, 1600 lumens, 80+ CRI , 3000K

Ym20/15c/30K/1600

Input Power: 19.0 W
Lumens: 1706 lm
Efficacy: 90 lm/W
CBCP: 15601
Beam Angle: 15.7°
Field Angle: 31.6°
Spacing Criteria: 0.27

∠	0°	45°	90°
0°	15423	15423	15423
5°	13235	11552	10525
10°	5840	4430	3671
15°	1892	1636	1542
20°	868	718	645
25°	370	308	286
30°	187	156	155
35°	108	89	91
40°	80	75	71
45°	75	71	61

Ym20/25c/30K/1600

Input Power: 19.1 W
Lumens: 1669 lm
Efficacy: 87 lm/W
CBCP: 7248
Beam Angle: 25.1°
Field Angle: 46.5°
Spacing Criteria: 0.45

∠	0°	45°	90°
0°	7244	7244	7244
5°	6459	6400	6436
10°	4534	4494	4597
15°	2531	2521	2627
20°	1138	1153	1225
25°	465	473	524
30°	208	210	241
35°	103	104	120
40°	50	51	58
45°	25	25	29

Ym20/40c/30K/1600


Input Power: 19.1 W
Lumens: 1619 lm
Efficacy: 85 lm/W
CBCP: 3539
Beam Angle: 36.2°
Field Angle: 66.7°
Spacing Criteria: 0.65

∠	0°	45°	90°
0°	3539	3539	3539
5°	3425	3421	3425
10°	2967	2964	2983
15°	2203	2205	2244
20°	1440	1448	1488
25°	850	855	890
30°	485	488	510
35°	271	269	283
40°	142	139	151
45°	73	72	79

Ym20/60c/30K/1600

Input Power: 17.5 W
Lumens: 1517 lm
Efficacy: 87 lm/W
CBCP: 1121
Beam Angle: 53.3°
Field Angle: 91.4°
Spacing Criteria: 1.00

∠	0°	45°	90°
0°	1118	1118	1118
5°	1089	1085	1076
10°	1030	1018	997
15°	937	922	887
20°	799	770	737
25°	632	598	576
30°	460	431	414
35°	308	287	279
40°	201	187	180
45°	126	117	108



3'	0.82' D; 1200 FC	1.34' D; 563 FC	1.96' D; 275 FC	3.01' D; 87 FC
6'	1.65' D; 300 FC	2.67' D; 141 FC	3.92' D; 69 FC	6.02' D; 22 FC
9'	2.47' D; 133 FC	4.01' D; 63 FC	5.88' D; 31 FC	9.03' D; 10 FC
12'	3.30' D; 75 FC	5.34' D; 350 FC	7.84' D; 17 FC	12.04' D; 5 FC
15'	4.12' D; 48 FC	6.68' D; 23 FC	9.81' D; 11 FC	15.06' D; 4 FC

CRI-CCT MULTIPLIER

CRI	CCT	Multiplier
8 (80+)	2200K	0.86
	2500K	0.91
	2700K	0.96
	3000K	1.00
	3500K	1.03
	4000K	1.05
9 (90+)	2200K	0.70
	2500K	0.77
	2700K	0.83
	3000K	0.86
	3500K	0.89
	4000K	0.91

CRI	CCT	Multiplier
H (97+)	2700K	0.66
	3000K	0.71
	3500K	0.75
	4000K	0.77
M (MonoWhite)	3000K	0.86
	3500K	0.88

OUTPUT MULTIPLIER

Package	Multiplier
13 W 1000 lm Ym20 COB-optic	0.65

YSRrm

Y-SERIES | YM20

SEMI RECESSED REMODEL

SOLAIS®









PROJECT

TYPE

SPECIFICATION




TM30 COLOR REPORTS

- 3000K with 80+ CRI
- $R_f = 84$; $R_g = 94$
- $R_A = 82$; $R_9 = 11$
- 3000K with 90+ CRI
- $R_f = 92$; $R_g = 100$
- $R_A = 93$; $R_9 = 56$
- 3000K with 97+ CRI
- $R_f = 96$; $R_g = 104$
- $R_A = 97$; $R_9 = 98$
- 3000K with MonoWhite
- $R_f = 91$; $R_g = 100$
- $R_A = 91$; $R_9 = 42$

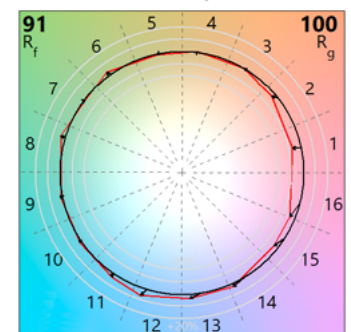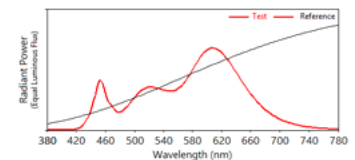

DIM TO WARM DETAILS | Dim to warm only available with 25° and 40° beam spreads; 90+ CRI

- 2700K to 1800K with 90+ CRI
- $R_f = 92$; $R_g = 100$
- $R_A = 93$; $R_9 = 57$

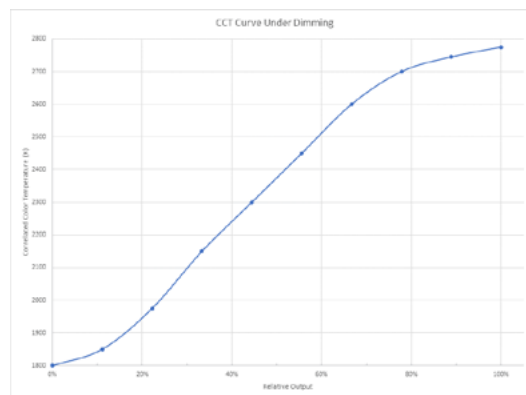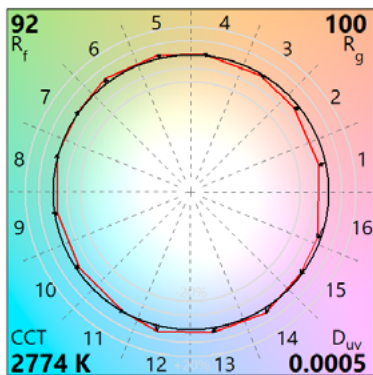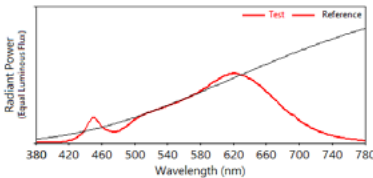

Ym20/25c/30K/1000


Input Power: 15.7 W
Lumens: 1012 lm
Efficacy: 65 lm/W
CBCP: 3537
Beam Angle: 28.0°
Field Angle: 53.4°
Spacing Criteria: 0.50

∠	0°	45°	90°
0°	3530	3530	3530
5°	3328	3305	3281
10°	2575	2546	2499
15°	1630	1619	1592
20°	894	890	874
25°	441	435	433
30°	222	216	217
35°	106	102	100
40°	43	40	40
45°	9	9	9

Ym20/40c/30K/1000

Input Power: 15.6 W
Lumens: 967 lm
Efficacy: 62 lm/W
CBCP: 2231
Beam Angle: 36.1°
Field Angle: 65.0°
Spacing Criteria: 0.65

∠	0°	45°	90°
0°	2225	2225	2225
5°	2148	2142	2128
10°	1880	1850	1824
15°	1434	1394	1366
20°	953	920	896
25°	563	540	527
30°	310	296	290
35°	157	152	149
40°	75	72	70
45°	31	30	29



WARNING: Not for use in Semi enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**