

Light Trespass Shields

HSS | FSS | CSS | HAS
INSTALLATION INSTRUCTIONS

ENERGYLITE



IMPORTANT: Read ALL instructions before starting installations.

CAUTION: To reduce risk of shock, **TURN OFF ELECTRICAL SUPPLY** before installing/servicing fixtures.


INSTALLATION INSTRUCTIONS FOR LIGHT TRESPASS SHIELD

- Remove trespass shield(s) from package.
- Ensure the optical frame and optic lenses are clean and free of debris. Clean with alcohol-water solution if necessary.
- Orient trespass shield so that the raised arrow is pointing towards "STREET SIDE" as shown below.
- Align (4) snap features with cutouts in the optical frame.
- Lightly push on each snap location until shield engages with the optical frame and makes a slight snapping noise.
- Ensure shield is fully engaged at each snap feature.


NOTE: - Trespass shields are not compatible with NEMA 3x3 optics (N33).

- Trespass shields are not intended to be used with glare shield accessories.

NO INSTALLATION TOOLS ARE REQUIRED FOR THE INSTALLATION OF THE LIGHT TRESPASS SHIELD

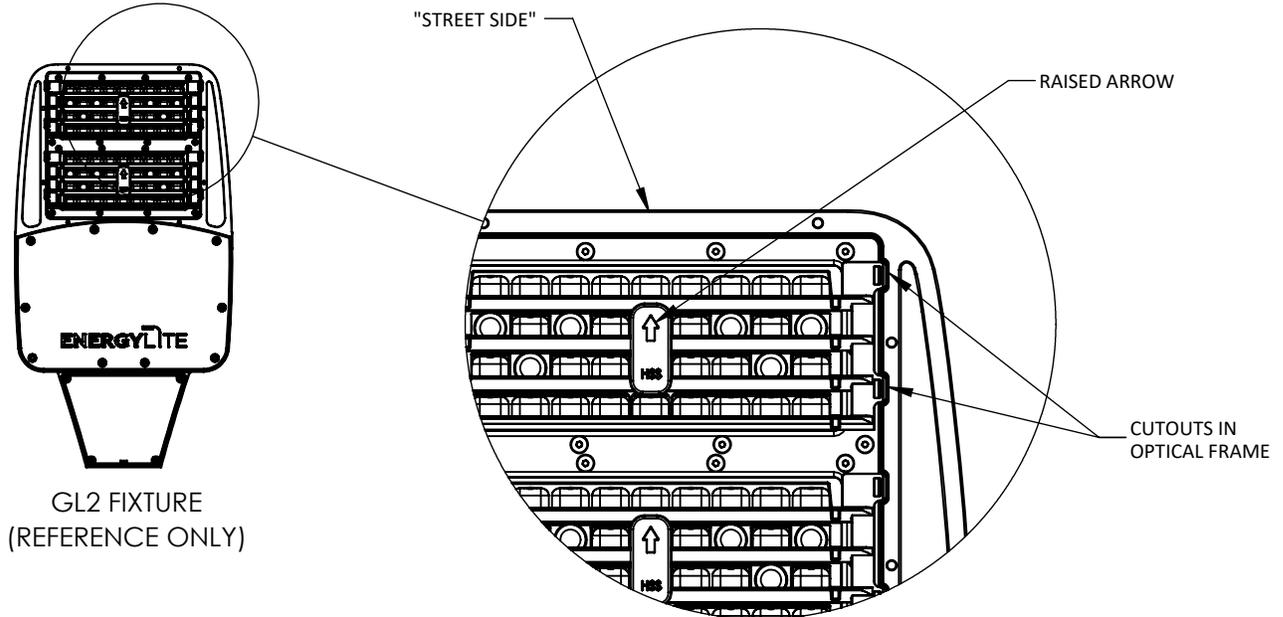

GL2 FIXTURE
(REFERENCE ONLY)

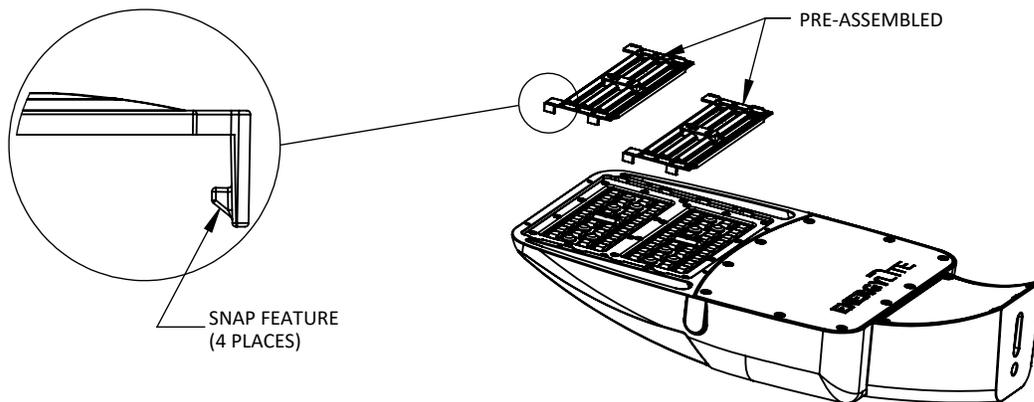

5017-000003, rev. C