

MAIN FEATURES

- Designed for hanging suspension mounted applications
- Concealed adapter option available; Great for use in architectural and high-end applications
- Field-cutable for custom lengths
- 0-10V dimming down to 1% with GP and GPC-type adapters
- Phase cut dimming with G-type adapter



Ordering Information

Track	Voltage	Circuits	Shape	Length	Finish
GP	2 - 277V	2 - 2-circuit/ 2-neutral	SH	4 - 4 ft. Track 8 - 8 ft. Track	PW - White BK - Black

ELECTRICAL + SAFETY

- 277V, 16A
- 4400W maximum load
- Up to 55 lb. load per 3 ft. section with 2 mounting points
- Up to 22 lb. load per 8 ft. section with 2 mounting points

RATINGS + CERTIFICATIONS

- UL Certified for dry locations
- RoHS-compliant
- Designed for use with Solais® G, GP and GPC-type fixtures and components

WARRANTY

- 1-year warranty

CONSTRUCTION + FINISH

- Extruded thermoplastic insulated 12 AWG solid copper conductors
- Insulated extruded body in PVC

Finish
PW - White
BK - Black

Accessories + Components



GP-UM-TCV - Track Cover
GP-SH-ECC - End Cap
GP-SH-LJB - Long Joining Bracket

GPXX-UM-SJC - Straight Joining Connector
GPXX-UM-SIC - Straight Insulating Connector (Mechanical)

GP22-UM-ACR - Adjustable Corner
GP22-SH-EFR - End Feed (Right Polarity)
GP22-SH-EFL - End Feed (Left Polarity)
GP22-SH-SFC - Straight Feedable Connector
GP22-SH-LFI - 'L' Feed (Inner Polarity)
GP22-SH-LFO - 'L' Feed (Outer Polarity)
GP22-SH-TOL - 'T' Feed (Outer + Left Polarity)
GP22-SH-TOR - 'T' Feed (Outer + Right Polarity)
GP22-SH-TIL - 'T' Feed (Inner + Left Polarity)
GP22-SH-TIR - 'T' Feed (Inner + Right Polarity)
GP22-SH-XFC - 'X' Feed Connector





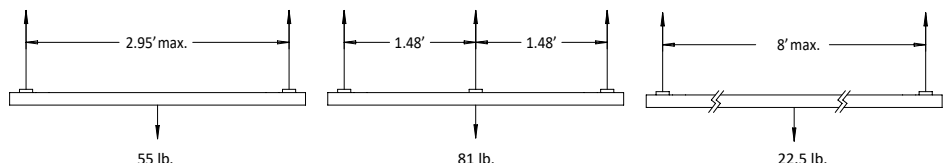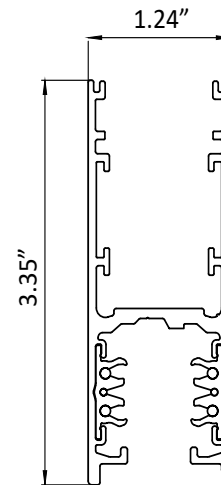


SS-UM-TST - T-bar Seismic Suspension Clip
SS-UM-ACL - Aircraft cable with Loop; 20 ft.
SS-UM-ACB - Aircraft cable with Barrel; 20 ft.
SS-UM-SEG - Side Cable Exit Gripper
SS-UM-SMC - Surface Mount Cable Gripper
SS-UM-DLG - Double Mechanism Looping Gripper

GP-UM-TCT - Cutting Tool




Gaia+ SH Components			Gaia+ Connectors		
GP-UM-TCV Track Cover PVC body; Length: 1000 mm			GP22-SH-LFI Polarized 'L' Feed (Inner) Polycarbonate body, copper alloy contacts		
GP-SH-ECC End Cap Polycarbonate body with locking screw			GP22-SH-LFO Polarized 'L' Feed (Outer) Polycarbonate body, copper alloy contacts		
GP-SH-LJB Long Joining Bracket for aircraft cable suspension. Recommended for use with SS-UM-SEG			GP22-SH-TOL Polarized 'T' Feed (Outer + Left) Polycarbonate body, copper alloy contacts		
GPXX-UM-SJC Polarized Joining Connector Polycarbonate body, copper alloy contacts			GP22-SH-TOR Polarized 'T' Feed (Outer + Right) Polycarbonate body, copper alloy contacts		
GPXX-UM-SIC Straight Insulating Connector Polycarbonate body			GP22-SH-TIL Polarized 'T' Feed (Inner + Left) Polycarbonate body, copper alloy contacts		
GP22-SH-EFR Polarized Live End Feed (Right) Polycarbonate body, copper alloy contacts			GP22-SH-TIR Polarized 'T' Feed (Inner + Right) Polycarbonate body, copper alloy contacts		
GP22-SH-EFL Polarized Live End Feed (Left) Polycarbonate body, copper alloy contacts			GP22-SH-XFC Polarized 'X' Feed Polycarbonate body, copper alloy contacts		
GP22-SH-SFC Straight Feedable Connector Polycarbonate body, copper alloy contacts					

Track Suspension Accessories

SS-UM-TSC	T-bar Seismic Suspension Clamp <i>For use where local code requires direct connection to the ceiling. Ceiling-supported clip for 15/16" T-bar</i>	
SS-UM-ACL	Aircraft Cable with Loop <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-ACB	Aircraft Cable with Barrel <i>20 feet of galvanized cable. Recommended for use with SS-UM-SEG.</i>	
SS-UM-SEG	Side Cable Exit Gripper <i>Recommended for use with SS-UM-ACL or SS-UM-ACB.</i>	
SS-UM-SMC	Surface Mount Cable Coupler <i>2-part non-adjustable cable coupler. Recommended for use with SS-UM-ACB.</i>	
SS-UM-DLG	Double Mechanism Looping Gripper <i>Double-ended gripper with double side cable exit. Recommended for use with SS-UM-ACB or SS-UM-ACL.</i>	
SS-UM-SBK	Seismic/Sway Bracing Kit <i>Cross clamps and Snap hooks for connecting to Eye-bolt by others. Recommended for use with SS-UM-ACB</i>	

Gaia+ Accessories

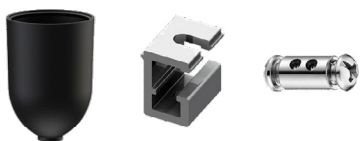SS-UM-CPC Ceiling cup with ceiling bracket and screw gripper <i>For use with cable suspension. Recommended for use with SS-UM-ACB.</i>	
GP-UM-TCT Cutting Tool <i>for track conductors. Steel</i>	